BOAT DRAIN PLUG LIGHT USER MANUAL & INSTALLATION INSTRUCTION



▶WARNINGS!

- LIGHTS ARE FOR <u>UNDERWATER USE ONLY!</u>
- PROFESSIONAL INSTALLATION IS RECOMMENDED.
- 1 AMP FUSE MUST BE USED ON ALL POSITIVE CONNECTIONS.
- WARRANTY WILL BE VOID IF FUSE NOT USED.
- 1 YEAR WARRANTY FROM DATE OF PURCHASE, REPAIR OR REPLACEMENT


▶Installation Instruction

- 1. Loosen the drain plug.
- 2. Run the cable leads thru the garboard drain opening and screw the drain plug light assembly into the existing garboard fitting. The garboard fitting is 1/2" NPT.
- 3. Connect the light wire to a 12 VDC or 24 VDC on/off switch. Plug in the waterproof connector if there is one.
- 4. Attach the red lead to Positive (+) with the included in line 3 AMP assembly fuse and the black lead to the Negative (-)
- 5. Switch on the light to check if it works well.

♦ Installation Demonstration



♦Wire Connection Diagram

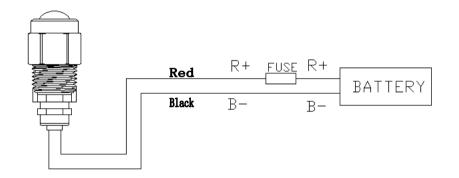

- Connect to 12VDC or 24VDC Battery or Power Source only.
- Do not operate this light out of water.